


IP BULLET CAMERA, 2MP WITH POE

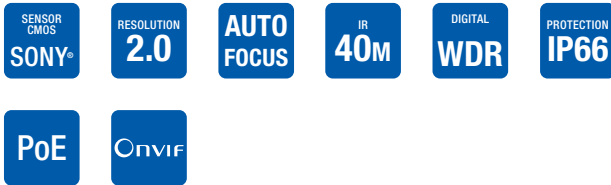

FEATURES

- Full HD resolution with Sony® CMOS sensor
- H.264 and MJPEG
- IR illumination up to 40 meters
- 2,8 ~ 12 mm autofocus motorized lens
- 2 way audio
- OSD menu, Digital WDR
- Integration with other brands by Onvif 2.4, SDK and RTSP
- Compatible with NEXTGEN ZVR/NVR via Onvif
- Intuitive P2P with QR code
- Free Webserver and CMS
- IP66
- PoE supported
- 3 AXIS bracket with wiring holes
- Reset button and waterproof cable

ACCESSORIES



HYU-251
Connection base

CAMERA

Image sensor	1/2,9 Sony® CMOS 2 MP	
Effective pixels	1920(H) x 1080(V)	
Resolution	Stream 1	PAL/NTSC: 1080P, 720P (25/30 fps)
	Stream 2	PAL/NTSC: D1, VGA, EGA, QVGA (25/30 fps)
IR illumination	5 led array: 40 meters	
Minimum illumination	0,1 lux F1,2 (color) / 0,01 lux F1.2 (B/W)	

LENS

Lens	2,8 ~ 12 mm
Lens type	Motorized
Focus mode	Auto

AUDIO

Audio channels	1 in / 1 out
----------------	--------------

FUNCTIONS

Day/night	Auto (ICR)
OSD menu	Supported
Backlight compensation	Digital WDR

ELECTRICAL & ENVIRONMENTAL

Power supply	12V DC
Power supply in/out	12V (to power external microphone)
PoE	Supported (802.3af, class3)
Working temperature	-20°C ~ +60°C
RH	85% HR
Protection	IP66

PHYSICAL FEATURES

Case	Metal
Dimensions	285 x 105 x 105 mm